



ConeLite 58

Product advantages

- Cone of light like halogen spot
- High-quality metal housing
- Bright versatile luminaire

Features

- High light output in relation to size
- Plug-in connection on housing
- Recessed light for 58 mm installation diameter

Application

- kitchen niches and top floors
- Shelves
- Display cabinets

Order information

- When a MultiWhite luminaire is connected directly to a ballast, the light colour is XtraWarmWhite; when using the adapter, the light colour is cool white.

ConeLite 58

	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
Stainless steel look	32 063 31	32 063 31	32 063 19	32 063 09
Black	32 063 35	32 063 35	32 063 15	32 063 05

Accessories


ConeLite 58 eds surface-mounted housing	36 968 07
Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01
M1 extension lead 1800 mm	36 768 01
MultiWhite colour change adapter XW/CW	39 304 40

Technical details




Luminaire type:	Recessed/ surface-mounted light
Type of lighting:	Functional/ accent lighting
Surface finish:	Stainless steel look/ Black
Operating voltage:	12 Volt DC
Light colour:	NeutralWhite/ WarmWhite/ XtraWarm/ MultiWhite
Colour rendering:	> 85 Ra
Luminous flux:	160 lm
Luminaire efficiency:	45 lm/W
Light source efficiency:	60 lm/W
Life span:	40,000 h (L80/B10)
Power consumption:	max. 3.5 W
Dimmable:	PWM
Beam angle:	90°
Half value angle:	50°
Test marks and symbols:	CE
Protection rating:	IP 44
Installed diameter:	56 mm
Supply lead:	3000 mm
Plug connector:	Mini connector M1

Light distribution diagram 50° - measured in black room

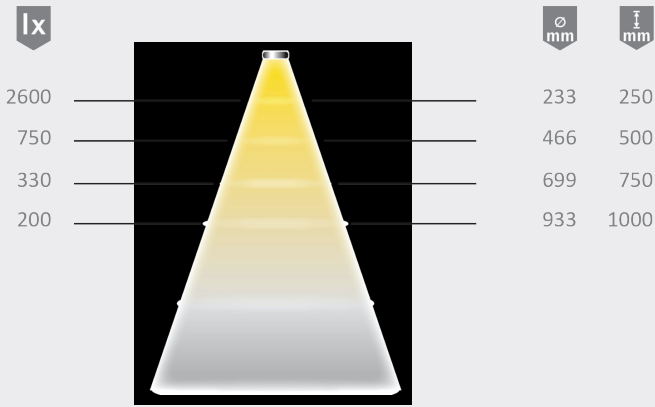

Light box

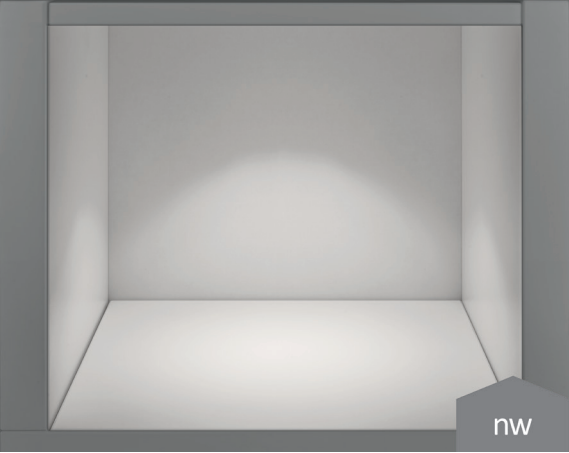

Assembly drawing

