



Ballast 12 Volt DC - 230 Volt dimmable

- Product advantages**

 - ▶ Short-circuit-proof
 - ▶ Overload-protected
 - ▶ Temperature-protected
- Ordering information**


 - ▶ Select ballast according to the power consumption (watts) of the luminaires
 - ▶ No additional dimmers or electronic switches may be used between the ballast and the luminaires.
- Features**

 - ▶ Dimmable with leading-edge or trailing-edge phase dimmer from third-party supplier via the socket outlet

Ballast 12 Volt DC - 230 Volt dimmable

Ballast 2-10 W (note minimum load) with Euro flat plug (1-way + 6-way distributor)	30 595 01
Ballast 5-30 W (note minimum load) with Euro flat plug (1-way + 6-way distributor)	30 586 01

Technical details

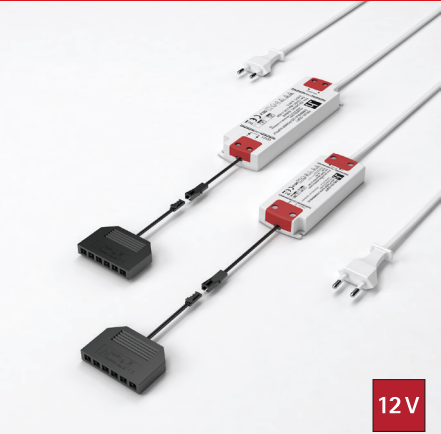

- Surface finish:

Operating voltage:

Mains frequency:

Output voltage:

Test marks and symbols:

Protection rating:

Supply lead:

Primary connector:

Lead output:

Standby:

Secondary connector:
- White

200-240 Volt AC

50/60Hz

12 Volt DC

CE  

IP 20

2000 mm

Euroflat

200 mm

< 0.5W

Mini connector M1

Assembly drawing

