


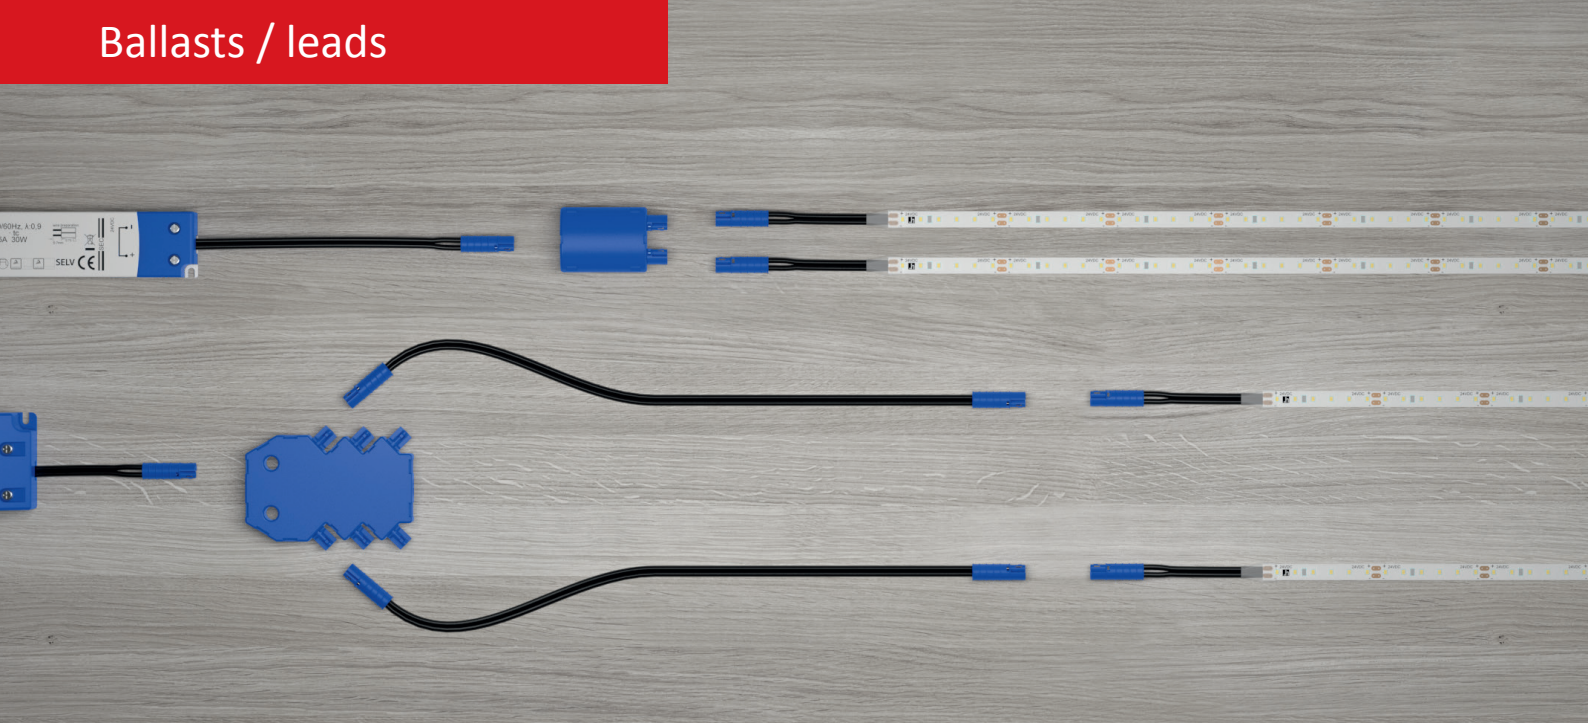

Ballast 24 Volt DC

- Product advantages**

 - ▶ Short-circuit-proof
 - ▶ Overload-protected
 - ▶ Temperature-protected
- Application**

 - ▶ For 24 V DC furniture lights
- Order information**

 - ▶ Select ballast according to the power consumption (watts) of the luminaires
- Features**

 - ▶ Combination with PWM dimmers possible secondarily

Ballast 24 Volt DC

Ballast with Euro flat plug 30 W	30 585 04
Ballast with Euro flat plug 75 W	31 017 01
Ballast with Euro flat plug 150 W	30 017 11
Ballast 12-75 W with Euro flat plug - 230 Volt AC dimmable*	30 594 12

Accessories

Cable clips, self-adhesive, small (set of 10)	26 021 01
MP2 2-way distributor	39 422 51
MP2 6-way distributor	36 996 01
MP2 extension lead 1800 mm	36 177 01

Technical details



Surface finish: White blue
Operating voltage: 200-240 Volt AC
Mains frequency: 50/60Hz
Output voltage: 24 Volt DC
Test marks and symbols:    
Protection rating: IP 20
Supply lead: 2000 mm
Primary connector: Euro flat / mini connector MP2
Lead output: 200 mm / 180 mm
Standby: < 0.5W / < 0.3W
Secondary connector: Mini connector MP2

* Dimmable with leading or trailing edge phase dimmer from third party supplier via the socket

Assembly drawing

