



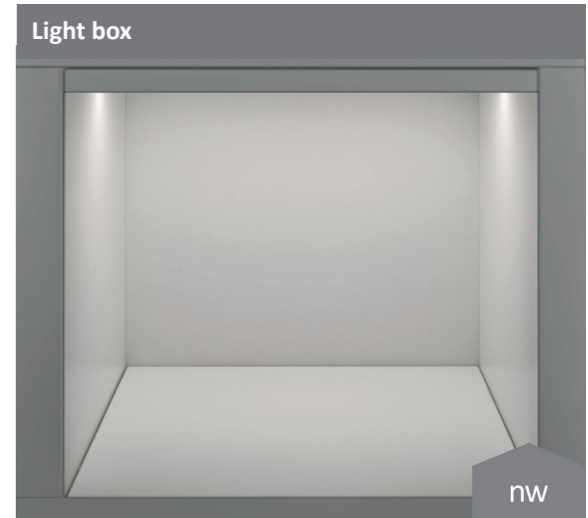

Light distribution diagram 70° - measured in black room

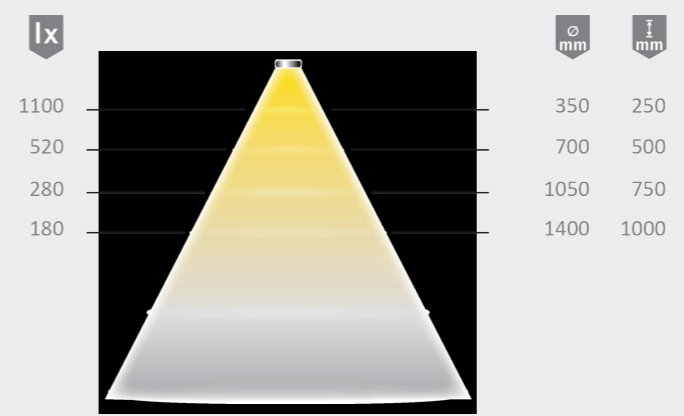

Versa Linear 600

- Product advantages**
- ▶ Perfect results even in flat profiles
 - ▶ Especially suitable for accent lighting
 - ▶ Extremely uniform, homogeneous luminous surface

- Application**
- ▶ Suitable for applications where the light source is visible
 - ▶ Ideal over reflective surfaces
 - ▶ Especially for flat ChannelLine profiles

- Features**
- ▶ Colour uniformity (colour location) as good as Versa Inside
 - ▶ No light spots visible in the profile due to white coating
 - ▶ Double-side supply lead (one cut, two lights), see drawing

- Order information**
- ▶ For the 10 m roll, feeders or soldering leads are required
 - ▶ MultiWhite accessories are required for MultiWhite light colour

Technical details



Versa Linear 600	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
1200 mm (max. 7.2 W)	56 038 32	56 038 42	56 038 12	56 038 02
3000 mm (max. 18 W)	56 038 33	56 038 43	56 038 13	56 038 03
5000 mm (max. 30 W)	56 038 34	56 038 44	56 038 14	56 038 04
10000 mm (max. 6 W/m)	56 038 31	56 038 41	56 038 11	56 038 01

Accessories	1 piece	10 piece
Feeder 130 mm for sections	36 373 42	
Feeder 1800 mm for sections	36 373 41	
Soldering lead 130 mm for sections	39 297 38	
Soldering lead 1800 mm for sections	36 248 01	
Direct connector	36 373 11	36 373 12
Corner connectors	36 373 01	36 373 02
Flexible connector 150 mm	36 373 31	36 373 32
Flexible connector 50 mm	36 373 21	36 373 22
Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07	
M1 extension lead 1800 mm	36 768 01	
MultiWhite colour change adapter XW/CW	39 304 40	

Luminaire type: Surface mounted light
 Type of lighting: Accent lighting
 Surface finish: White
 Operating voltage: 12 Volt DC
 Light colour: NeutralWhite / WarmWhite / MultiWhite / XtraWarm

Luminous flux: 600 - 660 lm/m
 Light source efficiency: max. 110 lm/W
 Colour rendering: > 90 Ra
 Life span: 60,000 h (L80/B10)
 Power consumption: max. 6 W/m

Max. length at a stretch: 6 m
 Dimmable: PWM
 Beam angle: 120°
 Half value angle: 70°

Test marks and symbols: CE
 Protection rating: IP 20
 Supply lead: 1800 mm
 Plug connector: Mini connector M1

Assembly drawing Can be shortened individually

