



IrisLite 68

Product advantages

- Can be switched and dimmed via the control light
- IrisLite can also be used individually with all controls

Features

- Recessed light with 68 mm installed diameter
- Optionally with integrated warm/cold control

Application

- Kitchen midway sections
- Display cabinets
- Shelves
- Ideal for retrofitting

Order information

- One IrisLite Control can control up to 12 additional IrisLite
- Distributors must be ordered separately

IrisLite 68

|                       | MultiWhite | XtraWarm  | WarmWhite |
|-----------------------|------------|-----------|-----------|
| Black, control light  | 32 356 35  | 32 356 35 | 32 356 15 |
| Black, standard light | 32 357 35  | 32 357 35 | 32 357 15 |

Accessories


|                                                      |           |
|------------------------------------------------------|-----------|
| Mounting housing IrisLite 68 sw                      | 36 481 05 |
| Ballast 20 W with Euro flat plug (6-way distributor) | 31 016 01 |
| M1 3-way distributor 180 mm                          | 36 852 01 |
| M1 6-way distributor 2000 mm                         | 36 125 01 |
| M1 extension lead 1800 mm                            | 36 768 01 |

Technical details




|                         |                                 |
|-------------------------|---------------------------------|
| Luminaire type:         | Recessed/ surface-mounted light |
| Type of lighting:       | Functional / accent lighting    |
| Surface finish:         | Black                           |
| Operating voltage:      | 12 Volt DC                      |
| Light colour:           | WarmWhite/ XtraWarm/ MultiWhite |
| Colour rendering:       | > 80 Ra                         |
| Luminous flux:          | 100 lm                          |
| Life span:              | 40,000 h (L80/B10)              |
| Power consumption:      | max. 2.7 W                      |
| Dimmable:               | No / PWM                        |
| Half value angle:       | 60°                             |
| Test marks and symbols: | CE                              |
| Protection rating:      | IP 20                           |
| Installed diameter:     | 68 mm                           |
| Supply lead:            | 1800 mm                         |
| Plug connector:         | Mini connector M1               |

Light distribution diagram 60° - measured in a black room

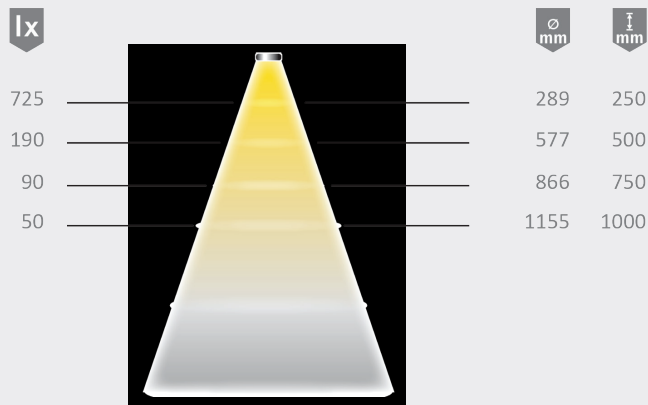

Light box

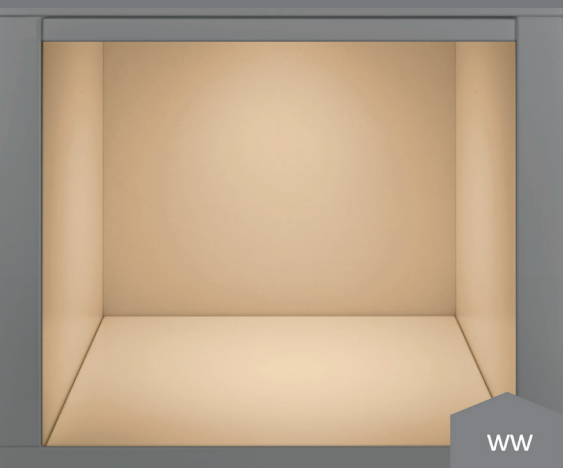

Assembly drawing

