



Shelf support

- ▶ Titan 1 with side adjustment
- ▶ Titan 2
- ▶ Titan 3

Technik für Möbel

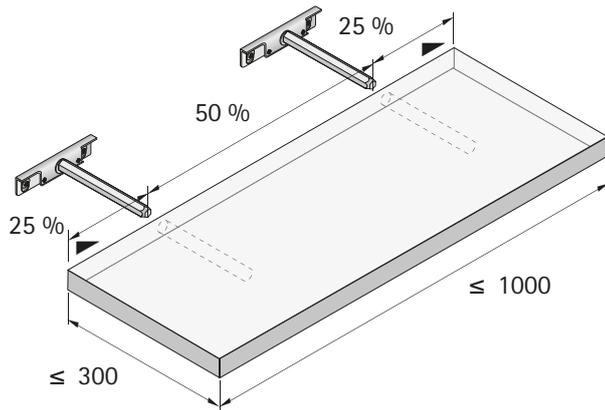


Titan 1 with side adjustment

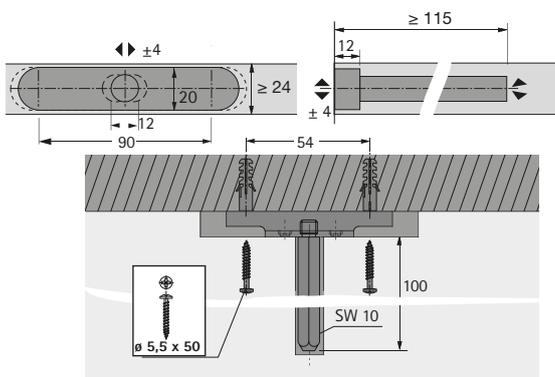

- ▶ Concealed installation behind the shelf
- ▶ Bolt: 10 mm A/F
- ▶ Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
- ▶ Max. load capacity includes the weight of the panel
- ▶ Max. load capacity with 2 shelf supports
- ▶ Height adjustment: ± 4 mm
- ▶ Side adjustment ± 4 mm
- ▶ Minimum shelf thickness: 24 mm




Titan 2

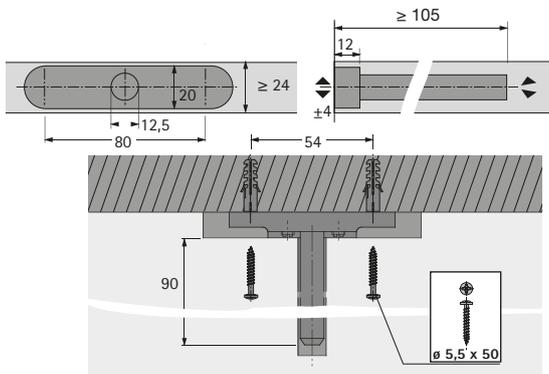

- ▶ Concealed installation behind the shelf
- ▶ Bolt: 12 mm ø
- ▶ Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
- ▶ Max. load capacity includes the weight of the panel
- ▶ Max. load capacity with 2 shelf supports
- ▶ Height adjustment: ± 4 mm
- ▶ Minimum shelf thickness: 24 mm



Titan 3

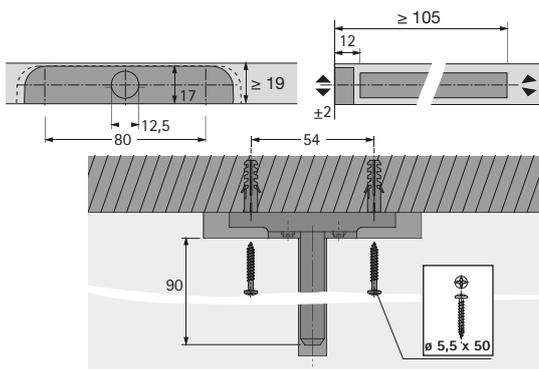

- ▶ Concealed installation behind the shelf
- ▶ Bolt: 12 mm ø
- ▶ Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
- ▶ Max. load capacity includes the weight of the panel
- ▶ Max. load capacity with 2 shelf supports
- ▶ Height adjustment: ± 2 mm
- ▶ Minimum shelf thickness: 19 mm

